
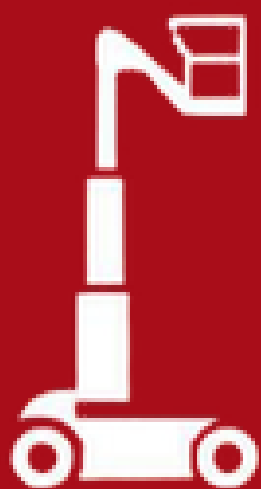


RElift

MAKE THE DIFFERENCE

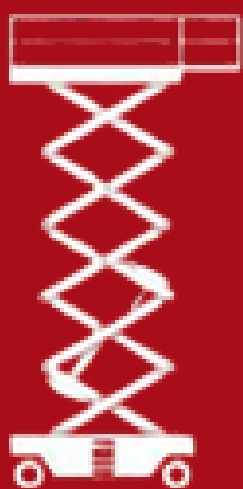




www.relift.in | Info@relift.in

DIESEL SCISSOR LIFT

- **RE18DS**



MODEL	RE18DS
TECHNICAL DATA	
Max. working height	18 m
A Max. platform height	16 m
B Max. outreach	1.2 m
Min. platform height	2.06 m
C Length stowed (with outriggers)	4.88 m
D Width stowed	2.3 m
Height stowed (guardrails folded)	2.47 m
E Height stowed (guardrails unfolded)	3.2 m
F Wheelbase	2.97 m
Ground clearance	0.32 m
Platform size – outer length	3.9 m
Platform length – double extended	6.3 m
Platform size – outer width	1.9 m
Platform size – guardrail height	1.15 m
Skirting board height	0.15 m
Weight	8810 kg
PERFORMANCE	
Lifting capacity	570 kg
Lifting capacity (extended platform)	230 kg
Drive speed (stowed)	5 km/h
Drive speed (raised)	0.7 km/h
Rising time	75 s
Lowering time	55 s
Gradeability	40%
Turning radius (inside / outside)	2.72 m / 5.89 m
Tilt sensor – front to back	3°
Tilt sensor – side to side	2°
Outrigger level ability – front to back	7°
Outrigger level ability – side to side	11°
Tyre specification / type	33×12-20
POWER SOURCES	
Engine Power	4TNV88 / 35.3 kW Yanmar
Drive mode	4WD × 2WS
Diesel fuel tank capacity	115 L
Hydraulic tank capacity	115 L

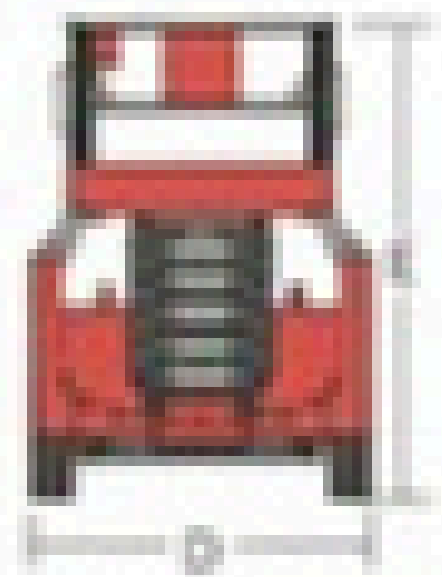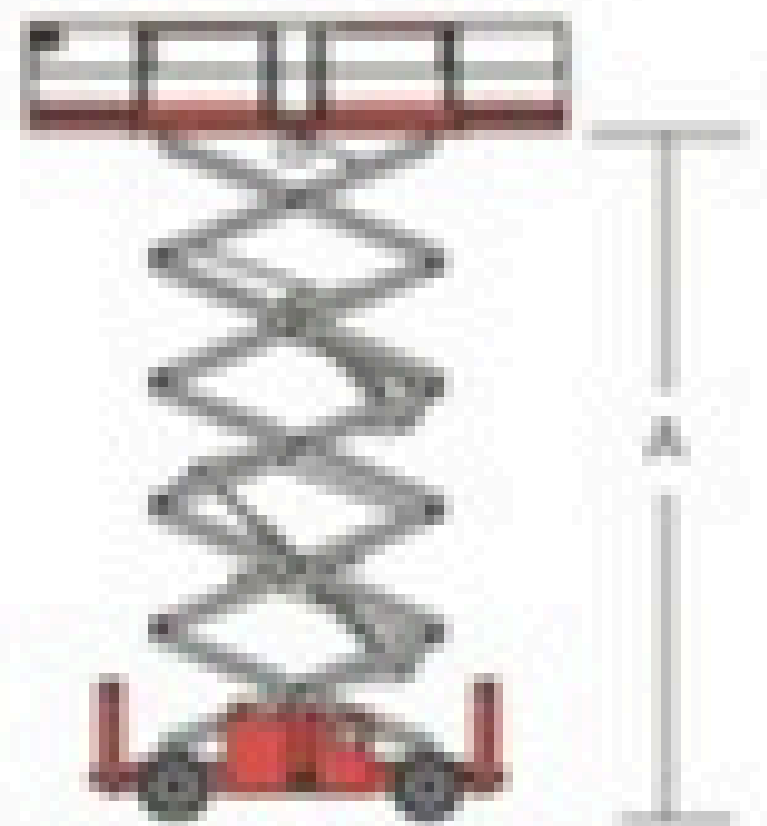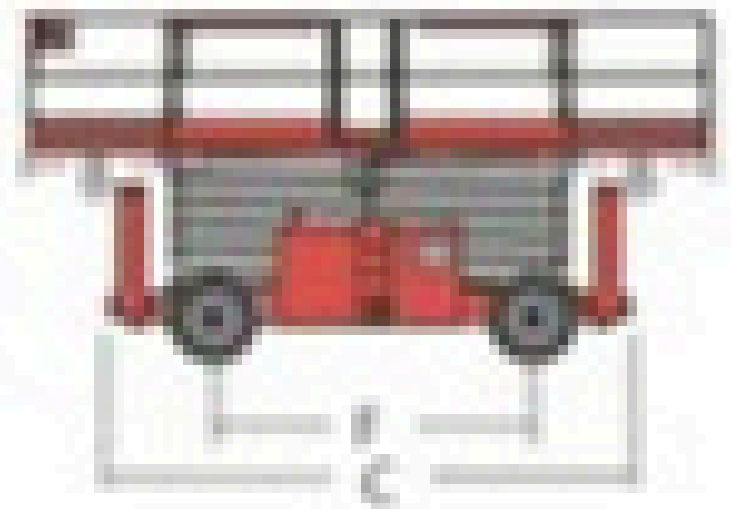

RElift

MAKE THE DIFFERENCE

HEADQUARTERS

Office No. 103, 104 Plan S Business Park, Plot no D 108/1, opp. D.Y.Patil Stadium, MIDC Industrial Area, Nerul, Navi Mumbai, Maharashtra 400705
Mobile : +91- 7456025602



www.relift.in | Info@relift.in