


# RElift

MAKE THE DIFFERENCE

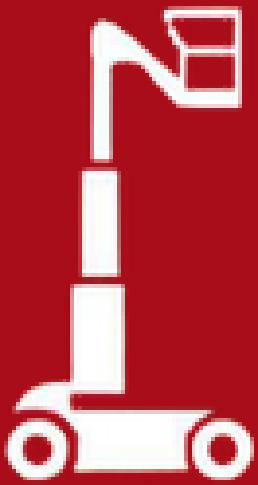

[www.relift.in](http://www.relift.in) | [Info@relift.in](mailto:Info@relift.in)

## SPIDER LIFT

- **RE30**  
- **RE30HY**   



### STANDARD EQUIPMENT

Articulated with double telescopic booms  
360° continuous turret rotation  
±80° platform rotation  
CAN-bus controlled  
One-button outrigger leveling  
Variable outrigger system  
Radio remote control  
Go home function  
Track width adjusting system  
Non-marking rubber tracks  
Full proportional control system  
Auto leveling platform  
Emergency hand pump  
Hour meter  
Hydraulic safety devices  
Platform overload sensor  
Removable aluminium platform  
Real-time data display in the control panel  
Double speed drive  
AC220V electric motor  
Standard painting: RAL5021  
AC220V electric socket in the platform  
Storage box for the radio  
Diesel engine

### ACCESSORIES

4 Sliding Pads  
Proportional valve emergency lever  
AC220V power cable for electric motor  
10m control cable for radio  
2 Rechargeable batteries for radio

### OPTIONS



Special painting  
83.2v-320AH Lithium-ion battery pack  
Lithium battery + diesel engine (hybrid)  
Black standard rubber tracks  
Lifting device (260kg capacity)  
Anti-collision kit for the platform

**RElift**

# TECHNICAL PARAMETERS

# RE30-30HY Spider Lift

MODEL	RE30-30HY
<b>TECHNICAL DATA</b>	
Working height	30.1 m
Platform height	28.1 m
Horizontal outreach	14.85 m
Up & over clearance	15.85 m
Negative working capacity	-6 m
Track width (adjustable)	1200 / 1530 mm
Total weight	5498 kg
A Platform length	1.81 m
B Platform width	0.71 m
C Platform height	1.11 m
D Stowed length	5942 mm
E Stowed length (without platform)	5382 mm
F Stowed width	1800 mm
G Stowed width (without platform)	1200 mm
H Stowed height (min)	2051 mm
I Outrigger footprint – length	5225 / 6195 mm
J Outrigger footprint – width	4215 / 3068 mm
K Track (length × width)	2065 × 260 mm
<b>PERFORMANCE</b>	
Platform capacity	230 kg
Gradeability (max)	30%
Travel speed (max)	1.3 km/h
Platform rotation	±80°
Turntable rotation	360° Continuous
Live load (travelling position)	6.43 kN/m <sup>2</sup>
Live load (working position)	2.66 kN/m <sup>2</sup>
Control	Radio remote control
<b>POWER SOURCES</b>	
Combustion engine (diesel)	Kubota D1105 – 18.2 kW
Electric motor	AC 220 V / 3 kW
Lithium battery (pure electric)	83.2 V – 320 Ah (option)
Lithium battery (hybrid)	25.6 V – 280 Ah (option)

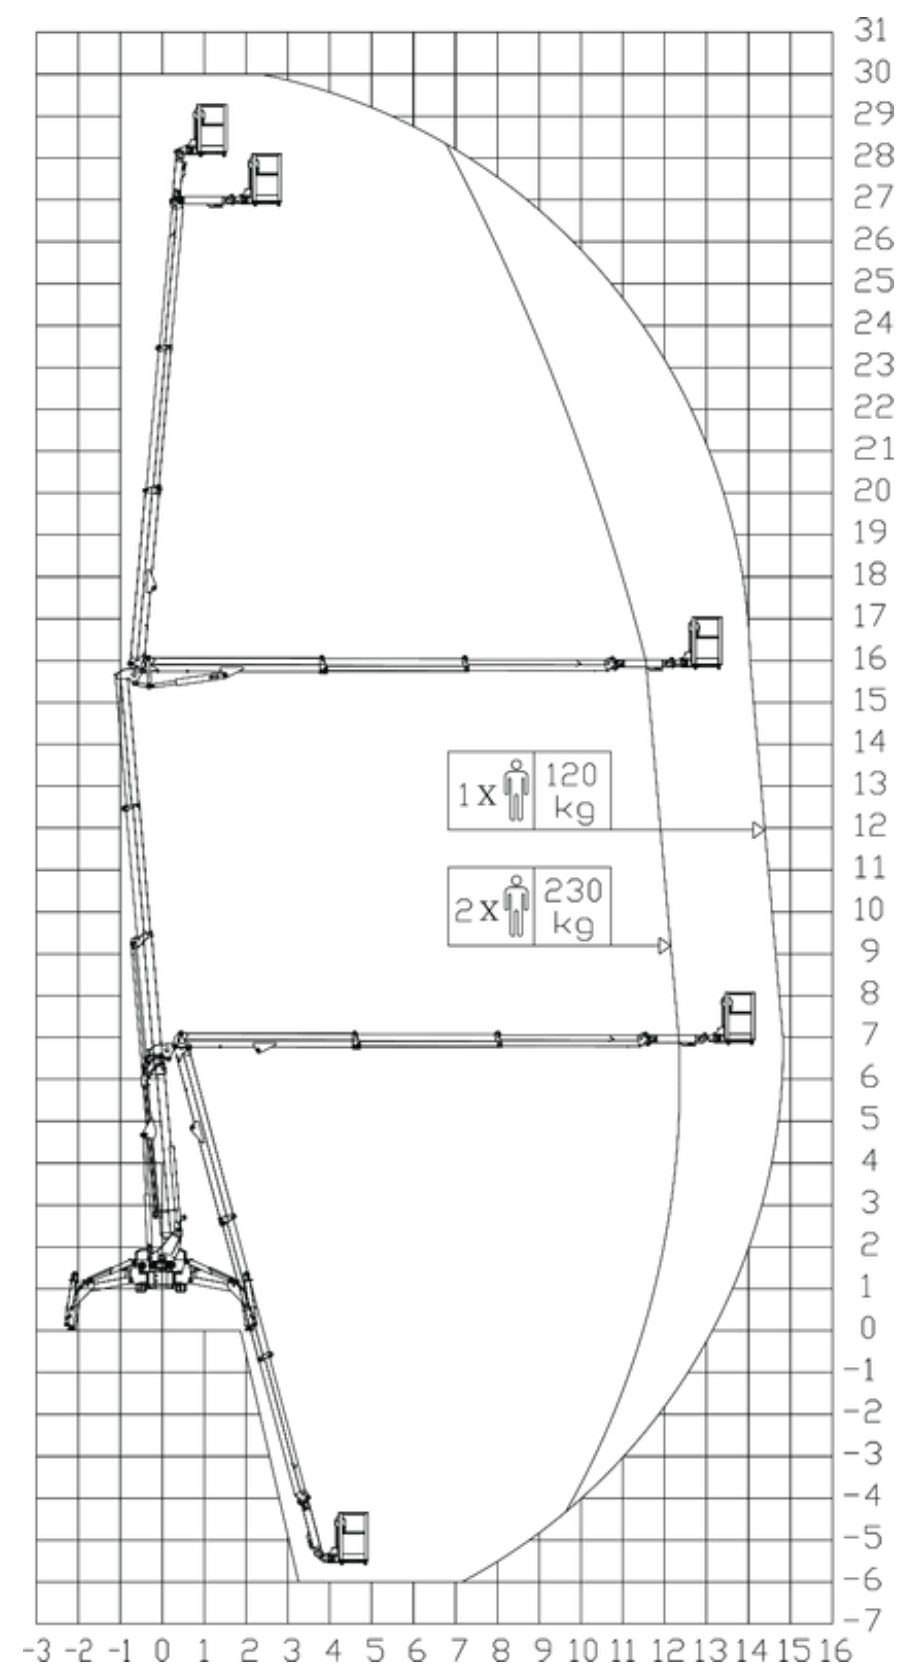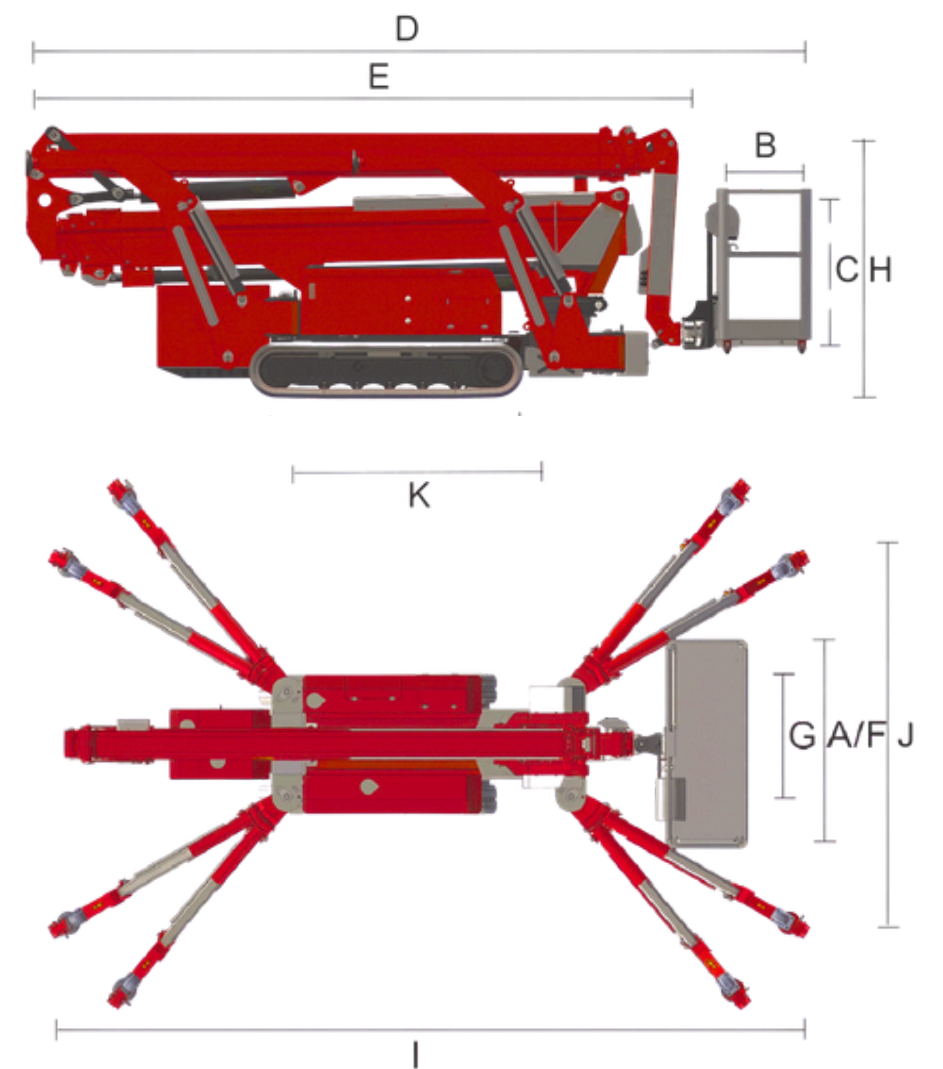

# RElift

MAKE THE DIFFERENCE

## HEADQUARTERS

Office No. 103, 104 Plan S Business Park, Plot no D 108/1, opp. D.Y.Patil Stadium, MIDC Industrial Area, Nerul, Navi Mumbai, Maharashtra 400705  
Mobile : +91- 7456025602



[www.relift.in](http://www.relift.in) | [Info@relift.in](mailto:Info@relift.in)