


RElift

MAKE THE DIFFERENCE

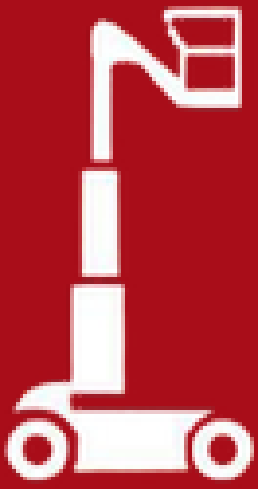

www.relift.in | Info@relift.in

DIESEL TELESCOPIC BOOM LIFT

• RED29TJ



STANDARD FEATURES

Hydraulic leveling platform

180* hydraulic rotation platform

Rear inspect and driving confirm

Three joysticks gradual proportional control

Horn and buzzer safety warnings

Flash light

Over load Sensor

5-inch super-scale colour screen

Diagnosis system

Emergency stop system

Emergency brake release

Emergency lowering system

Tilt alarm

4 wheel brake

Foam filled tire

Foot switch

Maximum tilt angle of 5°

Strong off-road capability

Long battery endurance

Compact structural design

Lithium power system

Environmentally friendly

Zero emission

Anti-extrusion device

Wide operating range

High torque drive

OPTIONS

Platform swing gate

Platform alternate railing

Hydraulic oil cooler

Hydraulic oil for extremely cold areas

Lifting device (260kg capacity)


Anti-collision kit for the platform

GPS

TECHNICAL PARAMETERS

RED29TJ Boom Lift

MODEL	RED29TJ
TECHNICAL DATA	
Working height (max)	28.7 m
Platform height (max)	26.7 m
Horizontal outreach (max)	18.5 m
Platform size (L×W)	2.44×0.91 m
Length (stowed)	10.76 m
Width (stowed)	2.5 m
Height (stowed)	2.83 m
Wheelbase	3 m
Ground clearance (center)	0.41 m
Weight	12600 kg
PERFORMANCE	
Lift capacity (max)	480 kg
Platform occupancy	2
Platform rotation	±90°
Vertical jib rotation	135°
Turntable rotation	360° Continuous
Drive speed (stowed)	5 km/h
Drive speed (raised)	1.1 km/h
Gradeability	45%
Working slope (max) (deg)	5°
Turning radius (inside)	2.76 m
Turning radius (outside)	6.09 m
Drive & steer mode	4×4×2
Tire type	36×14-20
POWER SOURCES	
Engine Power	36kw@2400rpm-2600rpm
Fuel tank	110 L
Hydraulic tank	110 L
Control voltage	12 V

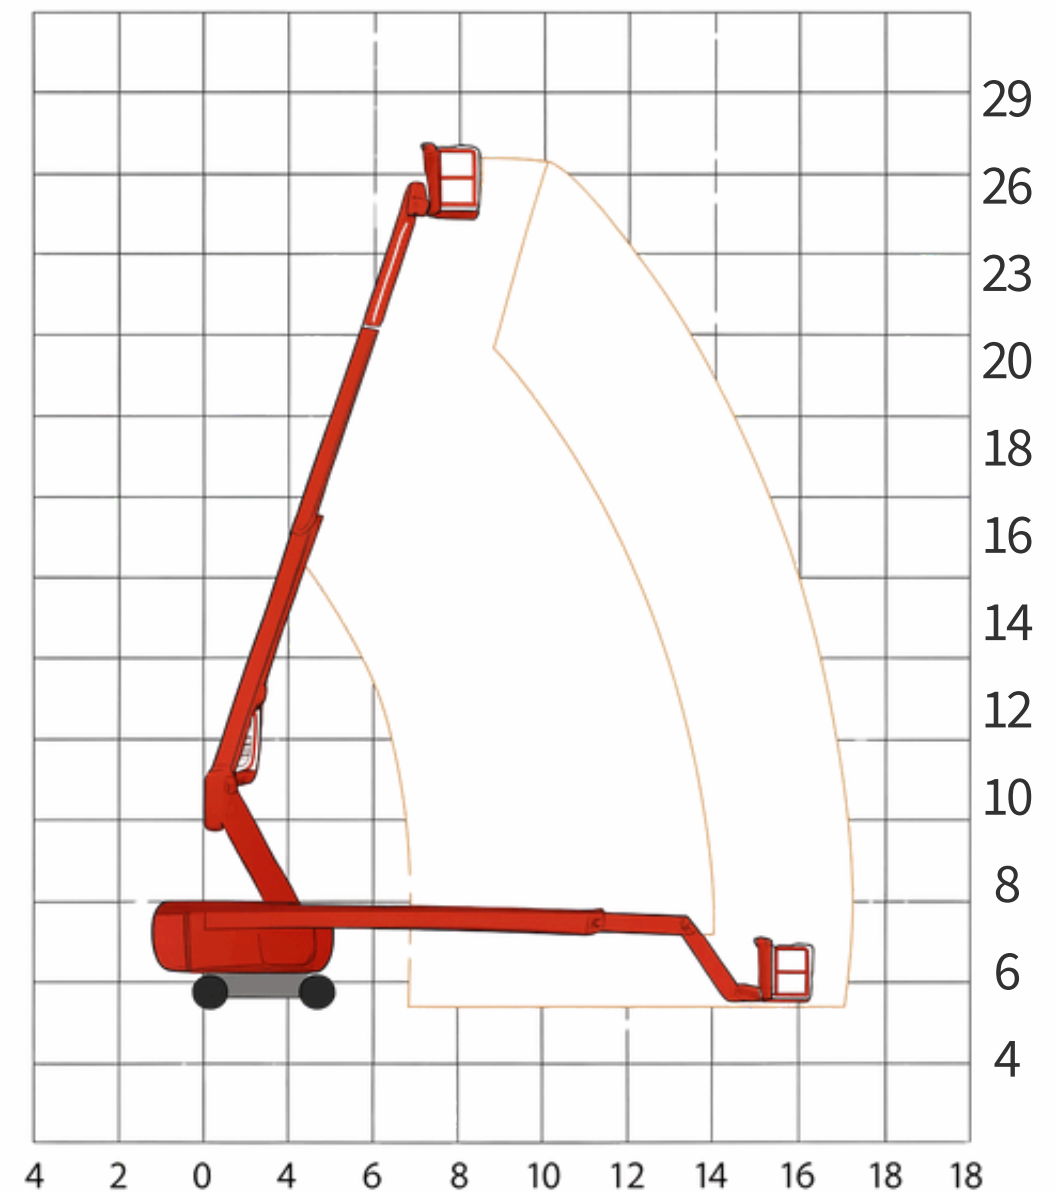

RElift

MAKE THE DIFFERENCE

HEADQUARTERS

Office No. 103, 104 Plan S Business Park, Plot no D 108/1, opp. D.Y.Patil Stadium, MIDC Industrial Area, Nerul, Navi Mumbai, Maharashtra 400705
Mobile : +91- 7456025602



www.relift.in | Info@relift.in